


### The ideal solution for residential premises


- Available in five radio command models.
- Transmitter to transmitter self-learning.
- Even with transponder function.
- 4,096 combinations.




### Dimensions of transmitters

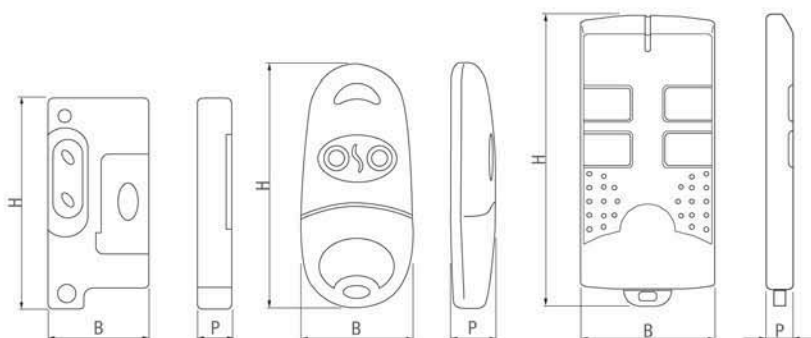

### Dimensions of receivers (mm)



001RBE4N  
001RBE42  
001RBE4MT



001RE432

### Dimensions (mm/in)

MODEL	B	H	P	Weight (g/oz)
TOP-432S	31/1.22	65/2.55	15/0.59	25/0.88
TOP-432NA	32/1.25	68/2.67	13/0.51	16/0.56
TOP-434NA	40/1.57	85/3.34	12/0.47	22/0.77
TOP-432A	45/1.77	92/3.62	15/0.59	44/1.55
TOP-434A	45/1.77	92/3.62	15/0.59	45/1.58

### Limits to use

MODEL	Range (m)
TOP-432S	50 ÷ 150 / 160 ÷ 500
TOP-432NA	50 ÷ 150 / 160 ÷ 500
TOP-434NA	50 ÷ 150 / 160 ÷ 500
TOP-432A	50 ÷ 150 / 160 ÷ 500
TOP-434A	50 ÷ 150 / 160 ÷ 500

### Technical features

Type	TOP-432NA - TOP-434NA	TOP-432A - TOP-434A - TOP-432S
Batteries	2 X CR2016 LITHIUM	1 x 12 V AAA
Combinations	4,096	1,024
Operating temperature (°C/°F)	-20 ÷ +55/-4 ÷ +131°C/°F	-20 ÷ +55/-4 ÷ +131°C/°F
Material	ABS	ABS

# The complete range



Code	Description
<b>433.92 MHz transmitters</b>	
001 <b>TOP-432NA</b>	Bi-channel multi-user transmitter. 4,096 combinations with self-learning function.
001 <b>TOP-434NA</b>	4-channel multi-user transmitter. 4,096 combinations with self-learning function.
001 <b>TOP-432A</b>	Bi-channel transmitters. 1,024 combinations.
001 <b>TOP-434A</b>	4-channel multi-user transmitter. 1,024 combinations.
001 <b>TOP-432S</b>	Bi-channel miniaturised transmitter. 1,024 combinations.
<b>433.92 MHz plug-in receivers</b>	
001 <b>AF43S</b>	Plug-in radio frequency card.
001 <b>AF43SM</b>	Plug-in radio frequency card with "eeprom" to store up to 128 codes (users).
<b>433.92 MHz surface-mounted receivers</b>	
001 <b>RE432</b>	12 - 24 V AC - DC IP54 surface-mounted bi-channel receiver.
 001 <b>RBE4MT</b>	12 - 24 V AC - DC IP54 surface-mounted 4-channel multi-user receiver to store up to 999 codes (users).
<b>230 V AC surface-mounted radio module</b>	
001 <b>RBE42</b>	230 V AC IP54 surface-mounted 4-channel radio module.
<b>12 - 24 V AC - DC surface-mounted radio module</b>	
 001 <b>RBE4N</b>	12 - 24 V AC - DC IP54 surface-mounted 4-channel multi-user radio module.
<b>Accessories for: 001TOP-432NA - 001TOP-434NA</b>	
009 <b>TAG</b>	Glass transponder bulb.
001 <b>P3V</b>	Package of n. 2 3 V DC type CR2016 lithium batteries.
<b>Accessories for receivers</b>	
001 <b>TOP-A433N</b>	Antenna.
001 <b>TOP-RG58</b>	Antenna cable.



NOTE:  
001TOP-432NA - 001TOP-434NA Max number of operators with differentiated code suggested for a single installation: 20.  
Ex.: an apartment block with 20 customised garage doors.