

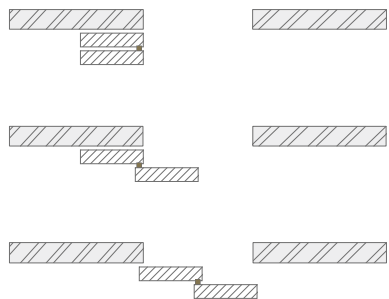
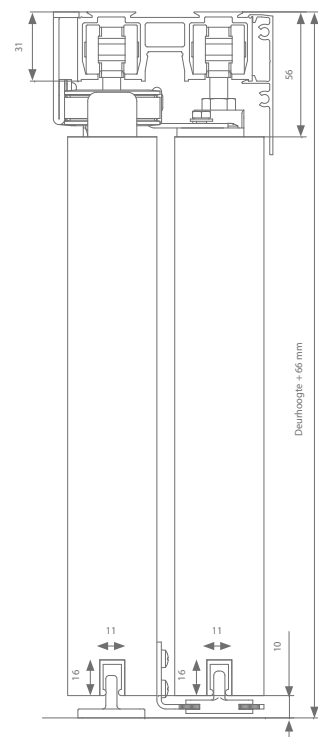


Technische tekeningen

Meenemerversie

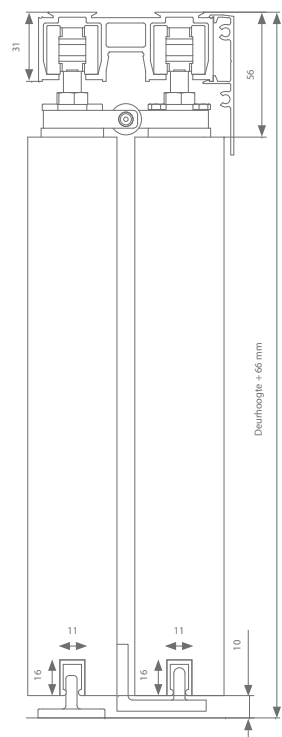

Riemversie

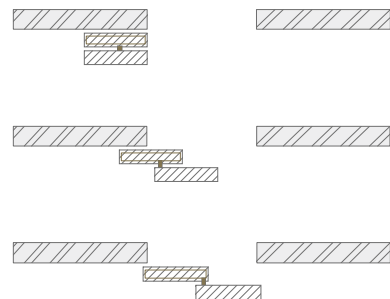

Hoogteregeling: + / - 3 mm

Min. dagmaat = 1120 mm - Max. dagmaat = 3900 mm

Profielen

	Max. deurbreedte	Lengte	Artikelnummer
Loopprofiel	667 mm	2000 mm	AK0.202.200
	1000 mm	3000 mm	AK0.202.300
	1334 mm	4000 mm	AK0.202.400
	2000 mm	6000 mm	AK0.202.600
Afdekprofiel	667 mm	2000 mm	AK0.948.200
	1000 mm	3000 mm	AK0.948.300
	1334 mm	4000 mm	AK0.948.400
	2000 mm	6000 mm	AK0.948.600
Geleidingsprofiel	1000 mm	1000 mm	(2x) 510.608.100
	1250 mm	1250 mm	(2x) 510.608.125
	1500 mm	1500 mm	(2x) 510.608.150
	2000 mm	2000 mm	(2x) 510.608.200

Garnituurkeuze



Dwarse ophanging	Artikelnummer
Meenemer versie - zonder softclose	AK0.202
Riem versie - zonder softclose	AK0.801


Elke garnituur is voorzien van alle benodigde rollen, ophanging, geleiding en stoppers.

Riem (enkel nodig bij riemversie)

Min. aantal riemlengte = 2 x deurbreedte + 500 mm

(aantal meter) x AK9.709.001

TIP



De geleider AK9.335 is ideaal wanneer u de geleider niet op de vloer wenst te bevestigen.