



# Fast assembly concealed hinge

- ▶ Sensys 110° hinge
- ▶ 110° opening angle, drilling pattern TB 45 x 9.5 mm

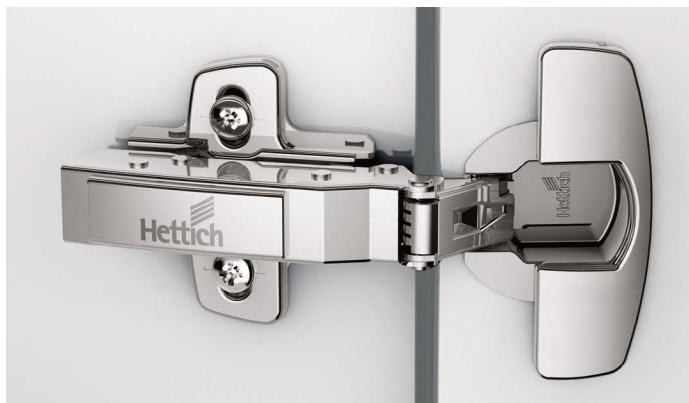


- ▶ Quality classification under EN 15570, Level 3
- ▶ For door thickness of 15 - 24 mm
- ▶ Cup depth 12.8 mm
- ▶ Integrated overlay adjustment +2 mm / -2 mm
- ▶ Integrated depth adjustment +3 mm / -2 mm
- ▶ Height adjustment at mounting plate
- ▶ Steel, nickel plated


Drilling pattern




full overlay  
(Base B 12.5 mm)



half overlay  
(Base B 3 mm)



inset  
(Base B -4 mm)



## With integrated Silent System, with self closing feature (Sensys 8645i)

Cup assembly	Mounting hole ø x T mm	full overlay		half overlay	inset
		50 ea.	200 ea.	50 ea.	50 ea.
for pressing in	ø 8 x 11		9 071 226	9 073 621	9 073 622
Fix fast assembly	ø 8 x 6	9 073 626		9 073 627	9 073 628

## Without Silent System, with self closing feature (Sensys 8645)

Cup assembly	Mounting hole ø x T mm	full overlay	half overlay	inset
		50 ea.	50 ea.	50 ea.
for pressing in	ø 8 x 11	9 073 650	9 073 651	9 073 652
Fix fast assembly	ø 8 x 6	9 073 653	9 073 654	9 073 655

## Without Silent System, without self closing feature, for handleless applications (Sensys 8675)

Cup assembly	Mounting hole ø x T mm	full overlay	half overlay	inset
		50 ea.	50 ea.	50 ea.
for pressing in	ø 8 x 11	9 073 674	9 073 675	9 073 676
Fix fast assembly	ø 8 x 6	9 073 677	9 073 678	9 073 679



[hettich.com/short/2b9840](https://hettich.com/short/2b9840)