


Barrel Hinges


SOSS Invisible Barrel Hinges are made of solid brass with brass links. They are easily installed. Just drill to the proper size and insert the hinge. SOSS Invisible Barrel Hinges are totally invisible from either side when the door is closed.

Easily Installed

Secure mounting in the wood door or panel is assured by tightening the tensioning screw. To accommodate more demanding light weight applications, the cylinders can be additionally secured by installing a chipboard or wood screw in the groove on the exposed end.



Not recommended for vertical or load bearing applications.
No load recommendations available.
Light applications only.

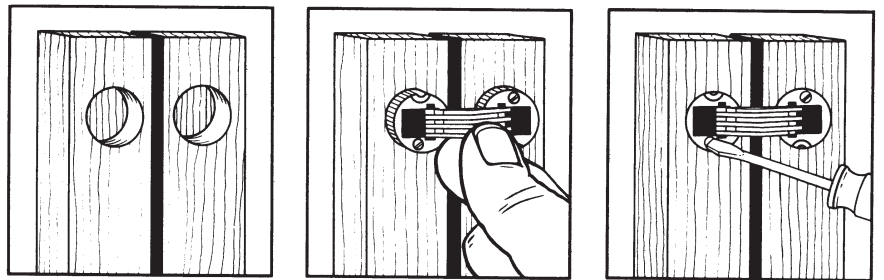


U.I.P. #	Min. Door Thickness	Drill Bit (mm)	Drill Bit (in.)	Dimensions (mm)				
				A	B	C	D min.	E max.
BH084	7/16"	8 mm	Letter "O"	8	9.6	11.6	1.9	1.1
BH104	1/2"	10 mm	25/64"	10	11	16.5	2.5	2
BH124	5/8"	12 mm	15/32"	12	13.5	20	2.5	2
BH144	3/4"	14 mm	35/64"	14	15.5	23	3	3
BH164	7/8"	16 mm	5/8"	16	16.5	25	3	3
BH184	1 1/8"	18 mm	45/64"	18	17.5	27	3	3
BH244	1 1/4"	24 mm	15/16"	24	25	36.5	3.5	3.5

Quadrant Hinges



Constructed of solid brass, the SOSS Quadrant Hinge is now available for woodworkers or manufacturers of high quality wood products. The hinge support is mortised into the case or frame so when the case is closed it is virtually invisible.

Available in either a bright gold or bright brass finish, the SOSS Quadrant Hinge adds a custom touch to that special wood project.



U.I.P. #	Description
QH4	Quadrant Hinge, Bright Gold Finish
QH5	Quadrant Hinge, Bright Brass Finish

Packaged two per bag, screws included.

